

DVM050-RGB

DVM050-WH

DVM100-RGB

DVM100-WH

DVM170-RGB

DVM170-WH



QuickConnect™

PressFit™

NoAir™

ClickOn™


Ultra Flat

CHARACTERISTICS

- 3 diameters 50/100/170mm
- Available in white and RGB
- RGB: 11 fixed colour programs, control via ON/OFF
- 12 VAC / 2 wire
- Polymer Housing
- Included in packaging:
 - Spectra DVM lamp
 - 2-wire cable, 2 meters
 - QuickConnect™ kit with Magic Nut
 - Retrofit kit PAR56 niche (170mm only)
- Always to be used in combination with toroidal transformer

ADVANTAGES

- Wide beam angle
- Waterproof NoAir™ housing
- PAR56 niche retrofit solution (170mm only)
- Compatible with salt electrolysis
- Quick and easy installation thanks to:
 - QuickConnect™
 - PressFit™
 - ClickOn™
- Personalize with VISION Face Plates

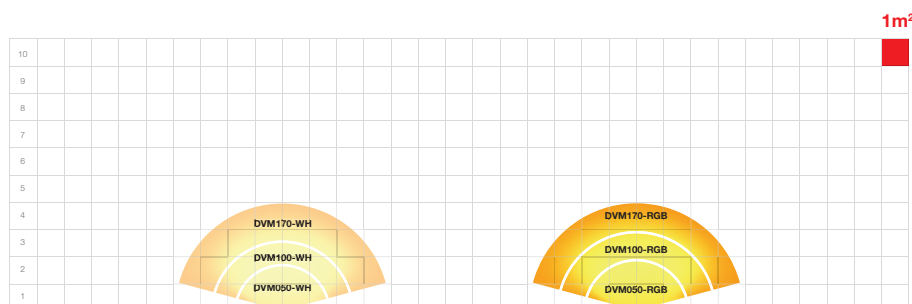

Values in graph refer to swimming pools with white or light-coloured walls that require 100-150 lm/m². Increase the light (lumen) by 50% for medium colours. Dark walls are difficult to illuminate and need up to 250% extra light.



TECHNICAL SPECIFICATIONS

CHARACTERISTICS	UNIT	DVM050-RGB	DVM050-WH	DVM100-RGB	DVM100-WH	DVM170-RGB	DVM170-WH
Diameter	mm	50	50	100	100	170	170
Light colour		RGB	White	RGB	White	RGB	White
Nominal colour temperature	K	-	5000	-	5000	-	5000
Max. light output	lm	400	375	1000	875	1600	1675
Beam angle	°	116	116	116	116	116	116
Max. power	W	8	5	16	9	20	17
Nominal input voltage	VAC	12	12	12	12	12	12
Water temperature	°C	up to 40	up to 40	up to 40	up to 40	up to 40	up to 40
Warranty	year	2	2	2	2	2	2

TO COMBINE WITH

WALL CONDUITS	FINISHING RINGS	CONTROL / POWER SUPPLY
VISION Wall Conduits 1,5" p. 24	VISION Face Plates p. 30-32	LINK Driver p. 86
VISION Wall Conduits Stainless steel p. 28	VISION Face Plates Ultra Flat p. 34	LINK Controller p. 90
		LINK Master p. 94