


TEC-POOL



TEC-POOL peristaltic pump




DIMENSIONS

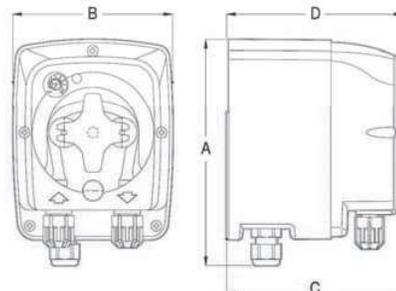

axbxc (mm): 128,8 x 90,6 x 104 x 100 Kg: 1,6
Kg 1.1



PACK



Single pack:
axbxc: 210x155x165 mm - Kg: 1,6
Multipack: 8pz/pcs
axbxc: 328x428x344 mm - Kg: 13



CONTEXT OF USE

• For dosing liquid products in private or public pools.



DESCRIPTION

Peristaltic pump for dosing liquid products for an adjustment and control instrument.
Speed adjustable from 10 to 100%. Priming switch.



TECHNICAL FEATURES

- Power supply: 100-240 VAC
- Absorption: 7 Watts
- Inputs: level (BNC)
- Switch: 3 positions
- Adjustment: 10-100% speed with potentiometer

Code	Model	Power supply	Flow rate (l/h)	Pressure (bar)	Consumption	Pipe
ADT100601001W000	TEC-POOL	100 ÷ 240 VAC	0,6-6	1	7 W	SANTOPRENE

INSTALLATION KIT

Code	Description	
KITPDP0005	installation kit TEC-POOL	



STANDARDS

- no. 2004/108/CE EMC directive
- no. 2006/95/CE "DBT Low Voltage Directive"
- no. 2011/65/UE , 2002/96/CE "RoHs and WEEE directives"